



HOBUT

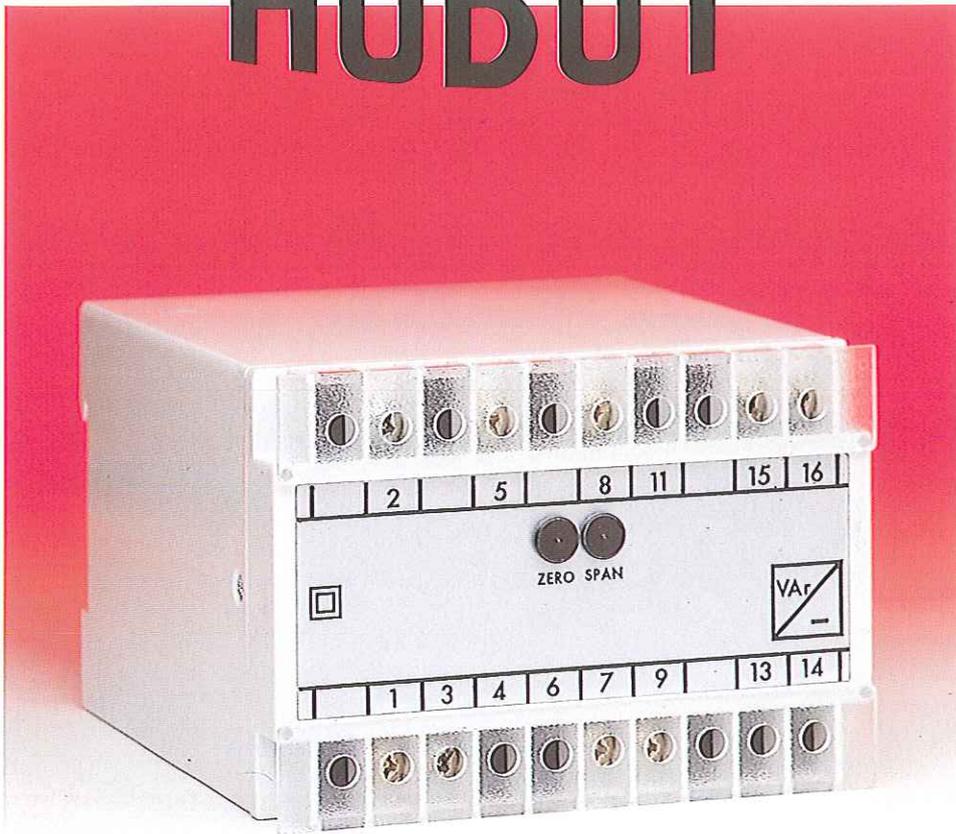

TRANSDUCERS

AC CURRENT

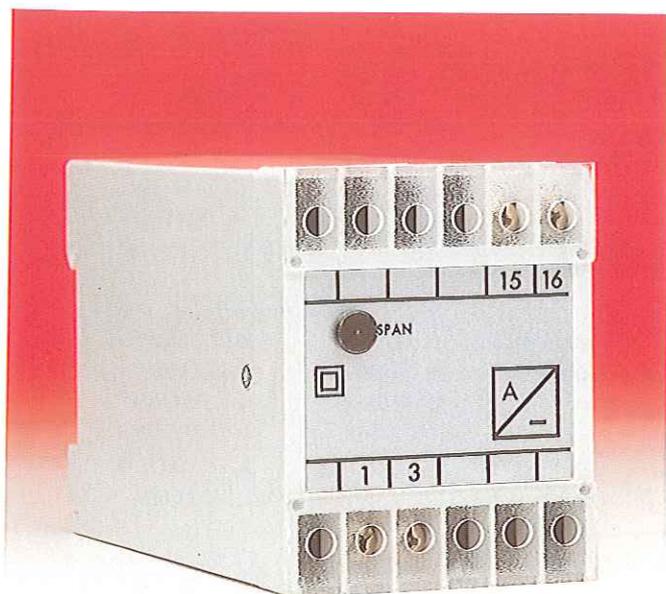

TECHNICAL SPECIFICATION

INPUT

Rated value In	1 or 5 Amp C.T. connected 0.5-10 Amp direct connected
Power consumption	<1 VA (AA1, AA3) <0.2 VA (AL1, AL3, AR1)
Working range	10-125% In (AA1, AA3) 0-125% In (AL1, AL3, AR1)
Rated Frequency	50 / 60 / 400 Hz
Frequency influence	0.005 % / Hz
Overload continuous	4 x In
Overload for 1 sec.	50 x In

OUTPUT

Rated value mA	0-1/5/10/20mA (AA1, AA3)
Rated value mA	0-1/5/10/20 & 4-20mA (AR1)
Rated value mA	4-20mA (AL1 AL3)
Rated value volts	0-5 / 10 V (AA1 AA3)
Rated value volts	0-5 / 10 & 1-5 V (AR1)
Rated value volts	1-5 V (AL1 AL3)

ADJUSTMENT

Zero	No adjustment (AA1 AA3)
Zero	± 2% (AR1, AL1 AL3)
Span	± 10% (AA1, AR1, AL1 AA3 AL3)

AUXILIARY

A.C. Voltage	115 / 230 / 400 V (± 25% / 45-65 Hz / < 2VA)
D.C. Voltage	24 / 48 / 110 V (± 20% / galvanically isolated / < 3 W) Note M100-AA1 AA3 are self powered

WEIGHT & CASE

M100-AA1	Approx. 0.3 kg. 55mm case
M100-AL1, AR1	Approx. 0.4 kg. 55mm case
M100-AA3	Approx. 0.6 kg. 100mm case
M100-AL3	Approx. 0.7 kg. 100mm case

ORDERING INFORMATION

Product Code	Input	In	Output	Aux	Freq.	Options
M100-AL1	5A		4-20mA	230V	50Hz	

OPTIONS

1. Non standard inputs / outputs only as far as technically acceptable.
2. A.C. Auxiliary in range 57.7 to 450 volts
3. Calibration at nominal Hz 35.....450Hz
4. Calibration at temperature other than 23°C

SELECTION GUIDE

M100-AA1	1 ph. self powered ave. sensing RMS calibrated
M100-AL1	1 ph. aux. powered ave. sensing RMS calibrated
M100-AR1	1 ph. aux powered true RMS sensing RMS cal.
M100-AA3	3 ph. self powered ave. sensing RMS calibrated
M100-AL3	3 ph. aux powered ave. sensing RMS calibrated

TYPICAL APPLICATIONS

The M100 series current transducers are designed to measure A.C. Current in single and 3 phase systems. They convert the A.C. signal to a D.C. Output that is directly proportional to the input signal.


The M100-AA1 AA3 are self powered (i.e. no auxiliary required) average sensing RMS calibrated current transducers, mA and voltage outputs are available.

The M100-AL1 AL3 are average sensing RMS calibrated, live zero current transducers. Auxiliary is required to provide power; so that 4mA output signal is present, when the input is zero.


The M100-AR1 is true RMS sensing RMS calibrated allowing measurement of distorted waveforms of up to 9th harmonic with a crest factor of 5. The AR1 is typically used in current measurement where distorted waveform is common, such as thyristor drives

The above units are used to measure current in energy management systems, switchboards, generator and telemetry controls. Isolation of 4kV is provided between the input and output signal, allowing the output to be fed to conventional analogue meters, digital meters, PLC, and computer systems.


AC CURRENT CONNECTION DIAGRAMS

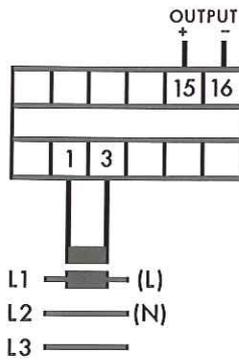


M100AA1

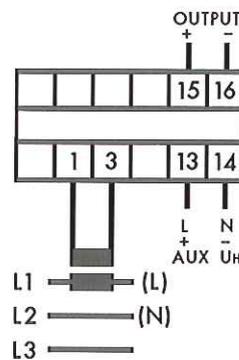


M100AL1/AR1/AX1

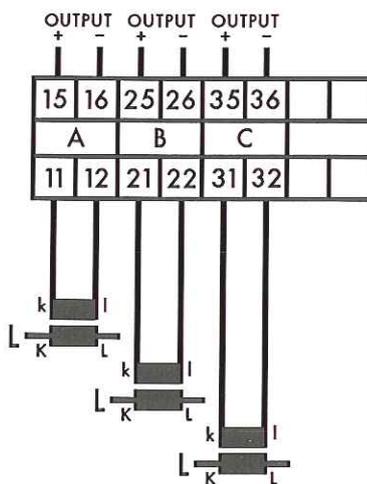


M100AA3

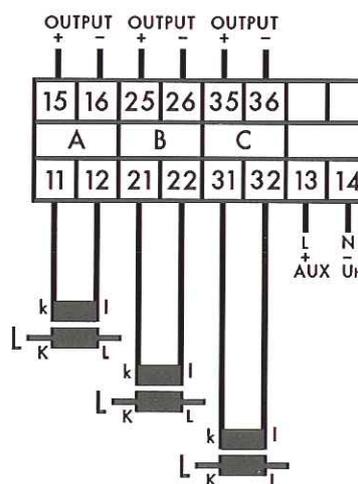

M100AL3/AX3

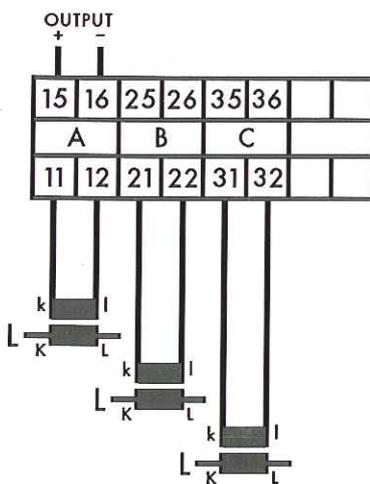

M100AAS

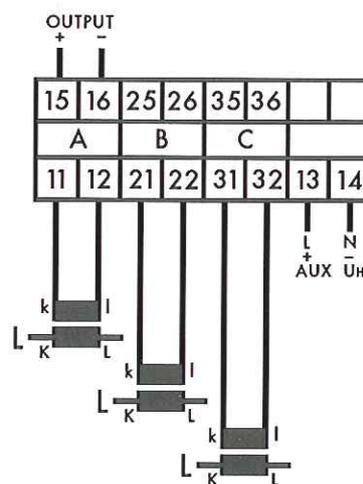

M100ALS

GENERAL SPECIFICATIONS

ENVIRONMENTAL

Working temperature	0 to +60 deg C
Functional temperature	-25 to +70 deg C
Storage temperature	-55 to +85 deg C
Temperature coefficient	0.02% per deg C (100 ppm / °C)
Relative humidity	95% non condensing
Class of climate	HSE complying with DIN 40040 -3 complying with VDE/VDI 3540

INSULATION

Test voltage	4kV RMS 50Hz 1min. between Input / Case / Auxiliary / Output
Impulse test	EMC 5kV transient complying with IEC 801 / EN55020
HF interference test	EHF 2.5kV 1MHz complying with IEC 255-4
Protection class	II complying with IEC 348 BS 4753 / DIN 57411 / VDE 0411

APPLIED STANDARDS

General	IEC 688 / BS 6253 / VDE/ VDI 2192
Safety	IEC 348 / BS 4753 DIN 57411 / VDE 0411 ANSI C37
Surge withstand	IEC 801 / EN 55020 ANSI C37-90a
Radio screening	RFI degree N complies with VDE 0875

ACCURACY

Class	±0.2 % complying with IEC 688
Calibration temperature	23°C
Temperature coefficient	0.01% / °C (100 ppm / °C)
Stability	0.05 % per annum non cumulative
Warm up time	<15 min

OUTPUT

Rated value	See individual product pages	
Load resistance mA (Unless otherwise stated)	1mA	<15 kOhm
	5mA	<3 kOhm
	10mA	<1.5 kOhm
	20mA	< 0.75kOhm
	4-20mA	< 0.75kOhm
Load resistance volts	1, 5 & 10 volts >1 kOhm	
Load influence	<0.1 %	
Ripple	<0.5% peak-peak at full load	
Response time	<200 msec for 0-99 % at full load	
Overload	<2 x rated value at full load	
No load voltage	<27 V	

ENCLOSURE

Fixing	Snap on to DIN rail 35 x 7.5 mm complies with DIN-EN 50022 BS 5584
Mounting	Any position
Enclosure Code	Case IP 50 / terminals IP 30 Complies with IEC 529 BS 5490 DIN 40050

APPROVALS

U.L. Approval	File No E157034
---------------	-----------------

CASE DIMENSIONS

All Dimensions in mm

