

127 SERIES MOULDED CASE CURRENT TRANSFORMERS


HOBUT

DESCRIPTION

A range of compact moulded case current transformers suitable for primary currents up to 6000A with built in terminal covers.

APPLICATION

For transforming various primary currents into 5A or 1A standard secondary using 120mm or 125mm busbars.

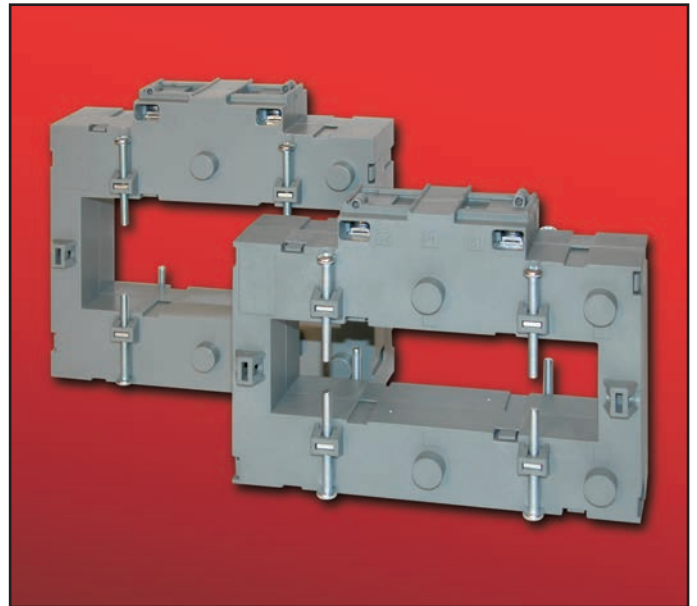

TECHNICAL SPECIFICATION

- Conforms to: IEC185, BS7626, BSEN 60044-1, IEC60044-1 and IEC 61869-2
- Rated System Voltage: 0.72/3kV
- Class 3, 1, 0.5, 0.2 or 0.2S available
- Ambient temperature range -5°C to +50°C
- Continuous current 1.2 x rated current
- Sealable terminal covers
- Protection CT's also available by request

RANGE


Type CTH127M

- Busbar window 127 x 38mm
- Primary current 400A - 4000A


Type CTH127L

- Busbar window 127 x 54mm
- Primary current 400A - 6000A

DIMENSIONS (mm)

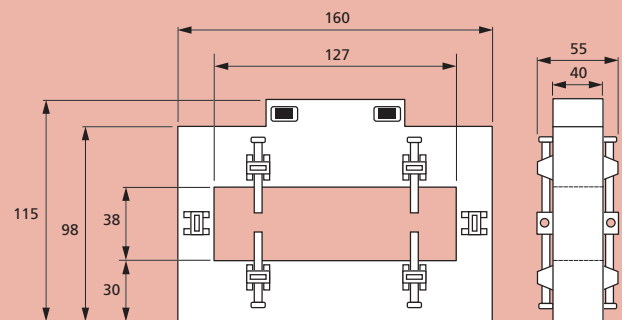

Type CTH127M

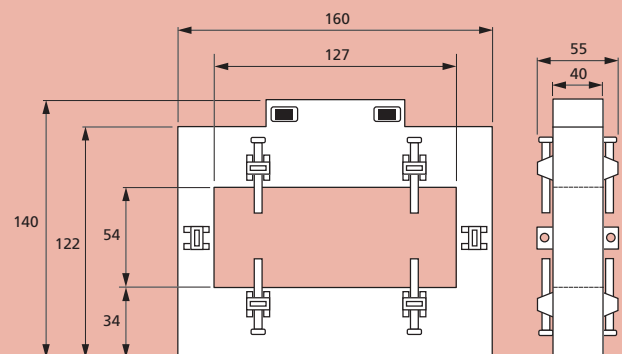

Type CTH127L

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626
International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk
<http://www.hobut.co.uk>