


240° DIN RANGE PANEL METERS

DESCRIPTION

96 X 96mm and 72 X 72mm DIN panel meters employing moving coil movements, with 240° scales. All products are supplied with terminal covers and are manufactured to IEC51.

APPLICATION

Used widely in the panel building industry where a standard DIN sized meter is required with a long scale for easy reading.

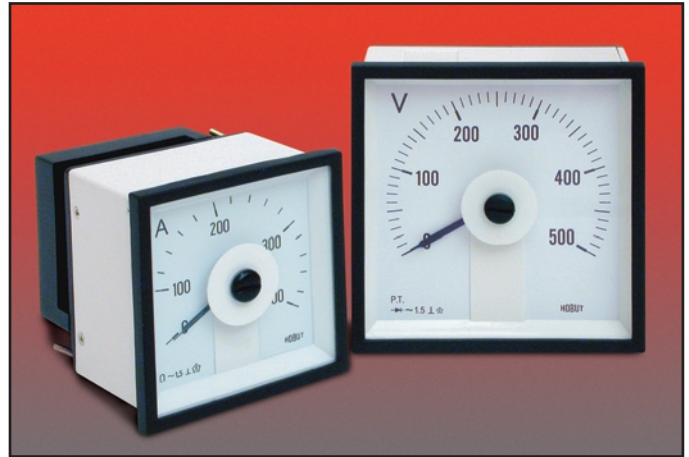

D96 & D72 - AC RANGES

Rating	Burden	Accuracy Class
1A or 5A CT operated, scaled as necessary (2 x overload supplied)	0.7VA typically at 50Hz	1.5
Voltmeters up to 500V	6VA max.	1.5

D96 & D72 - FREQUENCY RANGES

Rating	Burden	Accuracy Class
45/65Hz, 220/240V standard	Up to 300mA nominal voltage	1.5

D96 & D72 - DC RANGES

Rating	Burden	Accuracy Class
1mA, scaled as necessary	Up to 500V drop	1.5
4/20mA, scaled as necessary	Up to 2.5V drop	1.5
Voltmeters up to 600V	1mA (1000Ω/V)	1.5
60mV to 300mV shunt operated, scaled as necessary	5mA (200Ω/V)	1.5


Specifications

Scale marking: DIN 43802
Protection (front of panel): IP52
Overload (A): 1.2 x rating for 2 hours / 10 x rating for 5 seconds
Overload (V): 1.2 x rating for 2 hours / 2 x rating for 5 seconds
Insulation test: 2kV at 50Hz for 1 minute
Temperature calibrated at 23°C, suitable for -25 to +40°C
Terminals: 2BA screw clamps

Options

- Special scales
- Self contained Wattmeters and Varmeters available on request

Dimensions (mm)

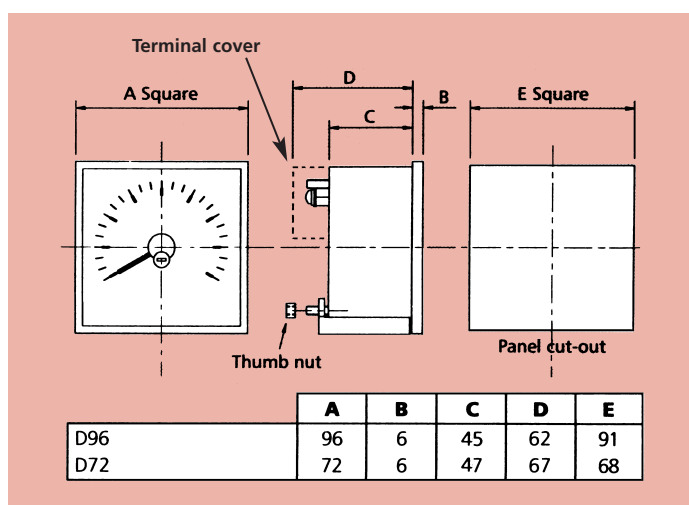

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626

International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk

<http://www.hobut.co.uk>