

CTV105M Moulded Case Current Transformers *(ANSI/IEEE spec)*

HO BUT

DESCRIPTION

Compact moulded case current transformers from 400 –3000 with UL recognition and a 105mm x38mm window (4.13" x 1.5").


APPLICATION

For transforming various primary currents into 1A or 5A secondary.




TECHNICAL SPECIFICATION

- 600V, 10KV BIL to IEEE C57.13
- Built in sealable terminal covers
- Built in busbar mounting
- 105mm x 38mm window (4.13"x1.5")
- Case Material: Polycarbonate
- Max Terminal Torque: 0.9Nm
- Max Bus clamp Torque: 0.2Nm

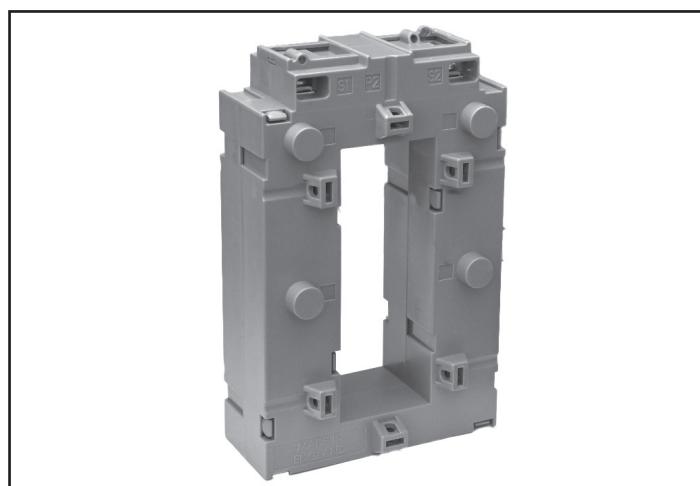

DIMENSIONS (mm)

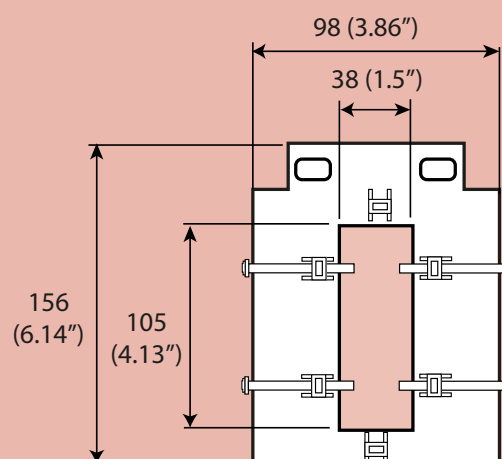

RANGE


	60Hz	Burden	B0.1	B0.2	B0.5	B0.9	B1.8	RF @30°
			2.5VA	5VA	12.5VA	22.5VA	45VA	
Part Number	Primary	Sec						
CTV105M400/5-ANSI-UL	400	5	0.6	1.2	1.2	-	-	1
CTV105M500/5-ANSI-UL	500	5	0.3	0.6	1.2	-	-	1
CTV105M600/5-ANSI-UL	600	5	0.3	0.3	0.6	1.2	-	1
CTV105M800/5-ANSI-UL	800	5	0.3	0.3	0.6	0.6	-	1
CTV105M1000/5-ANSI-UL	1000	5	0.3	0.3	0.6	0.6	-	1
CTV105M1200/5-ANSI-UL	1200	5	0.3	0.3	0.6	0.6	-	1
CTV105M1500/5-ANSI-UL	1500	5	0.3	0.3	0.6	0.6	-	1
CTV105M1600/5-ANSI-UL	1600	5	0.3	0.3	0.3	0.6	-	1
CTV105M2000/5-ANSI-UL	2000	5	0.3	0.3	0.3	0.6	-	1
CTV105M2500/5-ANSI-UL	2500	5	0.3	0.3	0.3	0.3	-	1
CTV105M3000/5-ANSI-UL	3000	5	0.3	0.3	0.3	0.3	-	1

1A secondary available by request.

Our policy is one of continuous development and therefore specifications may change without notice.

CTV105M Moulded Case Current Transformers (ANSI/IEEE spec)

HOBUT

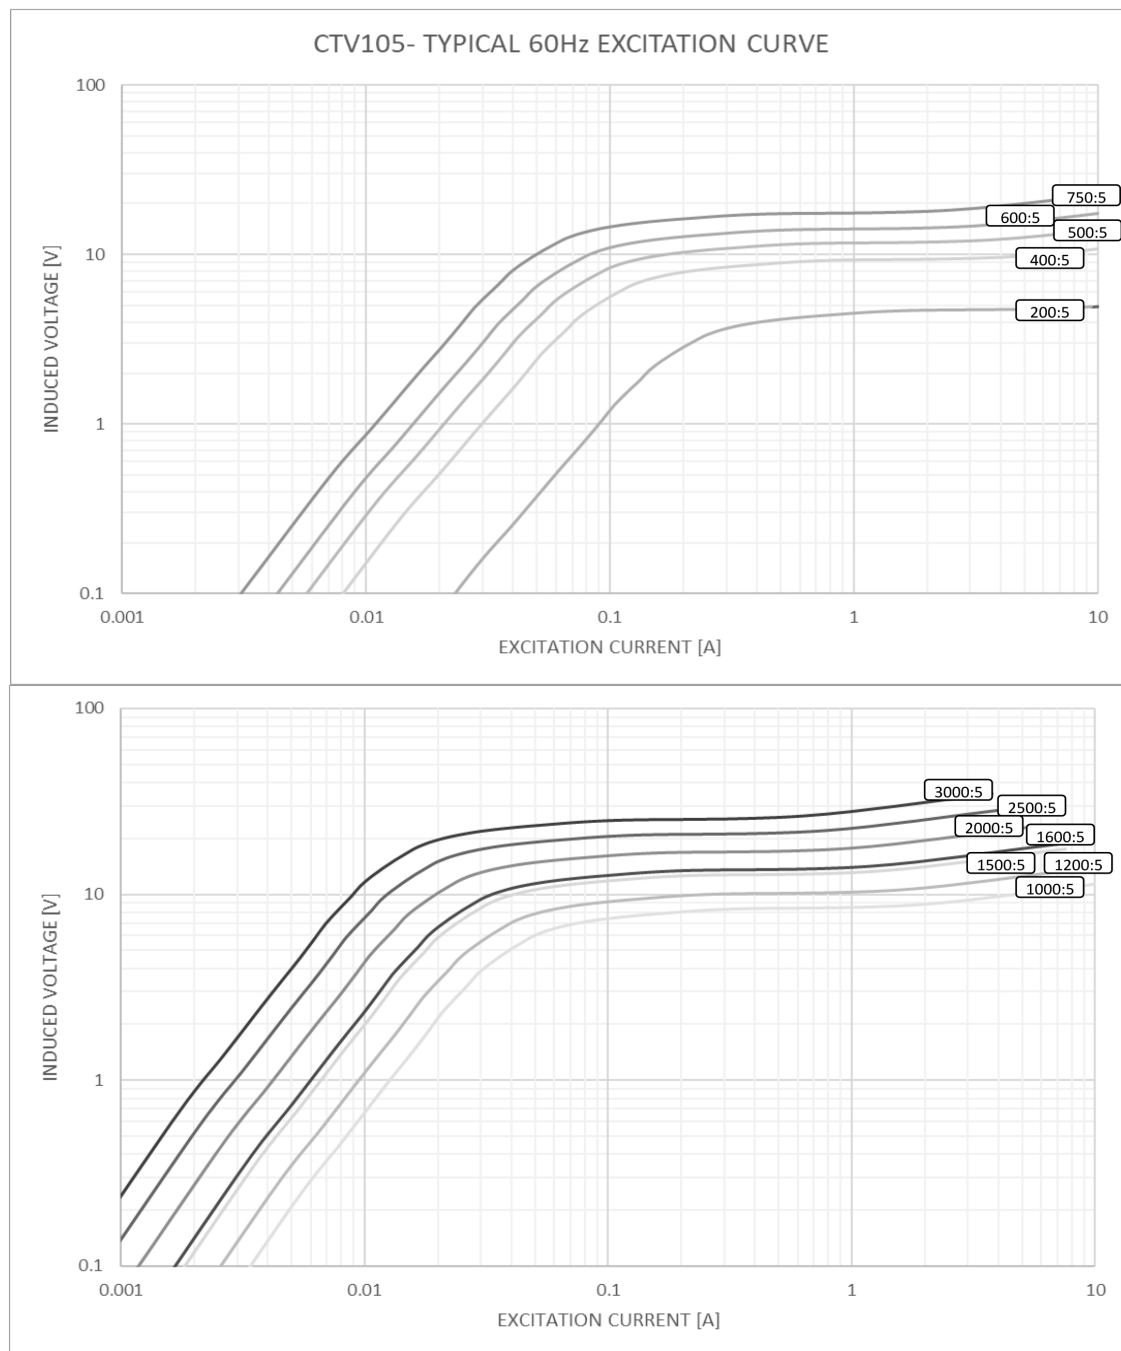

Our polic

notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD

WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626

International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk

<http://www.hobut.co.uk>