

CTV65M Moulded Case Current Transformers (ANSI/IEEE spec)

HOBUT

DESCRIPTION


Compact moulded case current transformers from 200 – 1600A with UL recognition and a 65mm x32mm window (2.6" x 1.26").

APPLICATION

For transforming various primary currents into 1A or 5A secondary.



DIMENSIONS (mm)

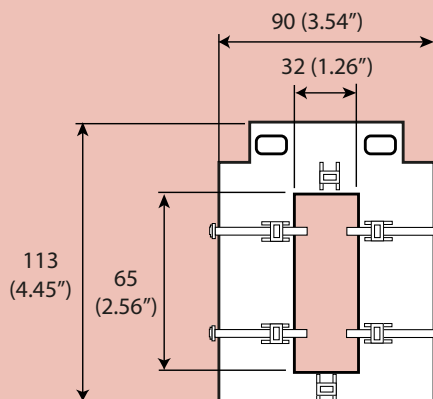

TECHNICAL SPECIFICATION

- 600V, 10KV BIL to IEEE C57.13
- Built in sealable terminal covers
- Built in busbar mounting
- 65mm x 32mm window (2.6" x 1.26")
- Case Material: Polycarbonate
- Max Terminal Torque: 0.9Nm
- Max Bus clamp Torque: 0.2Nm


RANGE

	60Hz	Burden	B0.1	B0.2	B0.5	B0.9	B1.8	RF @30°
			2.5VA	5VA	12.5VA	22.5VA	45VA	
Part Number	Primary	Sec						
CTV65M200/5-ANSI-UL	200	5	1.2	2.4	-	-	-	1
CTV65M400/5-ANSI-UL	400	5	1.2	1.2	2.4	-	-	1
CTV65M500/5-ANSI-UL	500	5	0.6	1.2	1.2	-	-	1
CTV65M600/5-ANSI-UL	600	5	0.6	1.2	1.2	1.2	-	1
CTV65M750/5-ANSI-UL	750	5	0.6	0.6	1.2	1.2	-	1
CTV65M1000/5-ANSI-UL	1000	5	0.3	0.6	1.2	1.2	-	1
CTV65M1200/5-ANSI-UL	1200	5	0.3	0.3	0.6	0.6	-	1
CTV65M1500/5-ANSI-UL	1500	5	0.3	0.3	0.6	0.6	-	1
CTV65M1600/5-ANSI-UL	1600	5	0.3	0.3	0.6	0.6	-	1

1A secondary available by request.

Our policy is one of continuous development and therefore specifications may change without notice.

CTV65M Moulded Case Current Transformers (ANSI/IEEE spec)

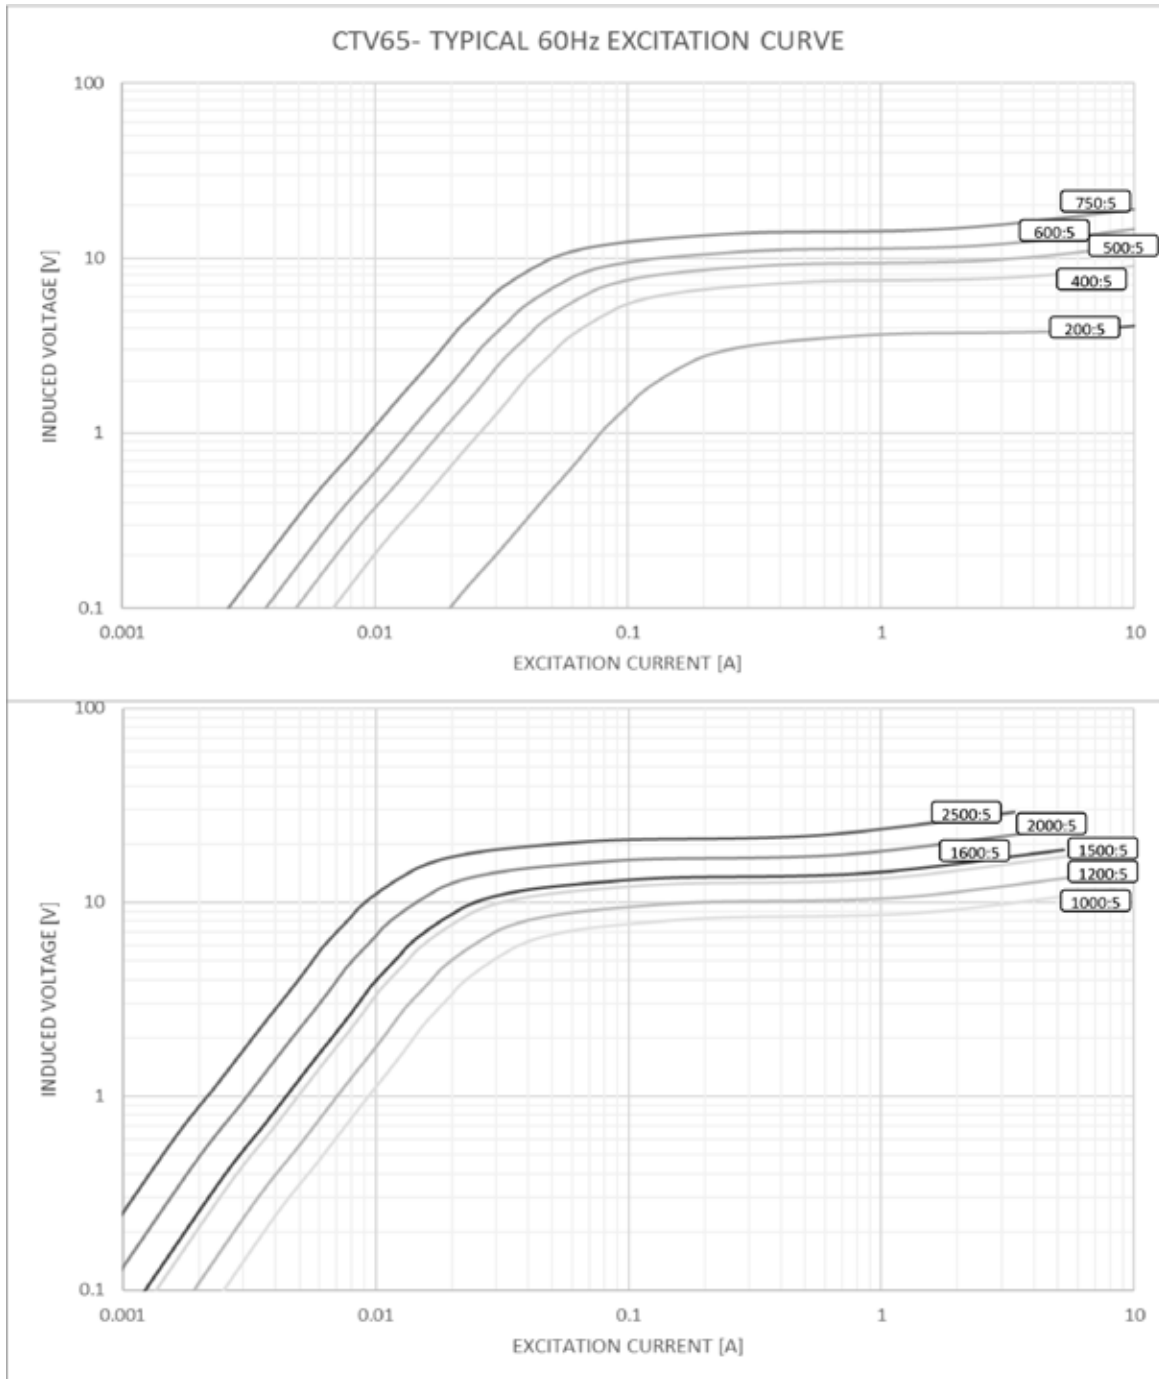

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD

WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626

International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk

<http://www.hobut.co.uk>