

# CTV65 Moulded Case Current Transformers

# HOBUT

## DESCRIPTION


Compact moulded case current transformers from 400 – 1600A and a 65mm x32mm window (2.6" x 1.26").

## APPLICATION

For transforming various primary currents into 1A or 5A secondary, in a range of accuracies including 0.5, 0.5S, 0.2 and 0.2S.



## DIMENSIONS (mm)

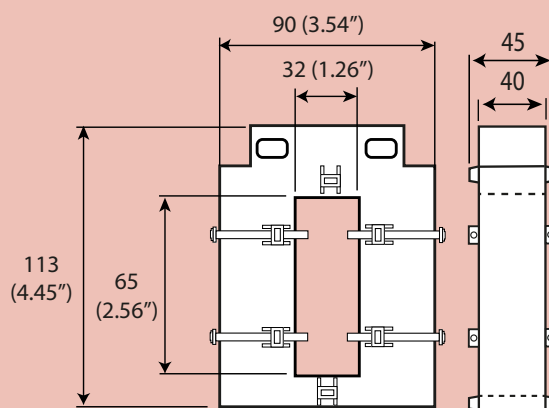

## TECHNICAL SPECIFICATION

- Conforms to IEC 61869/2
- Built in sealable terminal covers
- Built in busbar mounting
- 65mm x 32mm window (2.6" x 1.26")
- Case Material: Polycarbonate
- Max Terminal Torque: 0.9Nm
- Max Bus clamp Torque: 0.2Nm
- Rated system voltage 0.72/3KV
- Ambient temperature range -5 to 50°C

## RANGE (5A Secondary) - Type CTV65

VA	Class1		Class 0.5		Class 0.5S		Class 0.2		Class 0.2S		
	5	10	5	10	5	10	5	10	5	10	
400/5	A5	A6	A8	-	-	-	-	-	-	-	-
500/5	B5	B6	B8	-	-	-	-	-	-	-	-
600/5	C5	C6	C8	-	C11	-	-	-	-	-	-
800/5	E5	E6	DE	E9	E11	E12	E14	E15	E17	E18	
1000/5	F5	F6	F8	F9	F11	F12	F14	F15	F17	F18	
1200/5	G5	G6	G8	G9	G11	G12	G14	G15	G17	G18	
1250/5	H5	H6	H8	H9	H11	H12	H14	H15	H17	H18	
1500/5	J5	J6	J8	J9	J11	J12	J14	J15	J17	J18	
1600/5	K5	K6	K8	K9	K11	K12	K14	K15	K17	K18	
2000/5	L5	L6	L8	L9	L11	L12	L14	L15	L17	L18	

1A secondary available by request. Other accuracies & VA manufactured by request.

**Order example:** A current transformer type CTV65 with 5A secondary and 1000 primary, 10VA, Class 1 = part number CTV65-5-F6

Our policy is one of continuous development and therefore specifications may change without notice.

## HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626

International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk <http://www.hobut.co.uk>