


CTM100 RANGE SUMMATION CURRENT TRANSFORMERS

DESCRIPTION

DIN rail mounted summation current transformers in compact sizes, available in 5A or 1A input and 1%, 0.5% or 0.2% accuracy.

APPLICATION

For summing of several independent loads on different or some systems.

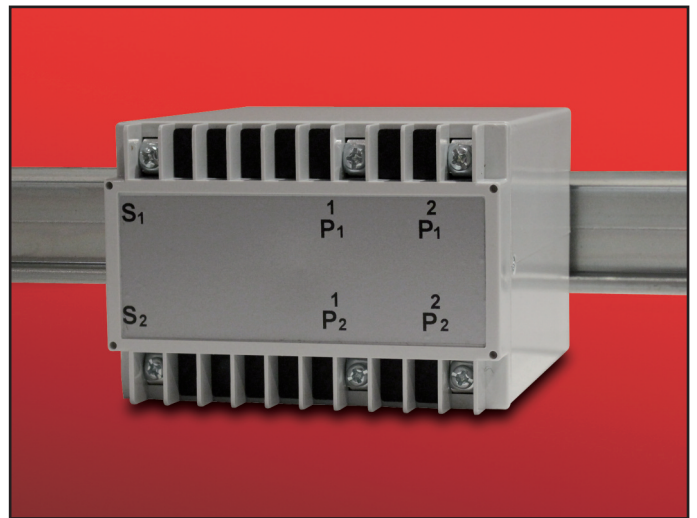

FEATURES

- DIN rail mounted
- Protected terminals
- Up to 9 inputs (equal ratio)
- Unequal ratios available on request

TECHNICAL SPECIFICATION


- Conforms to EN 60044-1 / EN 61869-2 and IEC 61869-2
- Rated system voltage 0.72/3kW
- Ambient temperature -5°C to +50°C
- Continuous current 1.2 x rated current

RANGE

No. OF INPUTS	RATIO (5A Secondary)	CLASS	VA	PART NUMBER
2	5+5=5	1	5	CTM1002X5/5-5/1
3	5+5+5=5	1	5	CTM1003X5/5-5/1
4	5+5+5+5=5	1	5	CTM1004X5/5-5/1
5	5+5+5+5+5=5	1	5	CTM1005X5/5-5/1
6	5+5+5+5+5+5=5	1	5	CTM1006X5/5-5/1
7	5+5+5+5+5+5+5=5	1	5	CTM1007X5/5-5/1
8	5+5+5+5+5+5+5+5=5	1	5	CTM1008X5/5-5/1
9	5+5+5+5+5+5+5+5+5=5	1	5	CTM1009X5/5-5/1

- 1A Secondary by request
- 10VA or 15VA by request
- Class 0.5 or 0.2 by request

DIMENSIONS (mm)

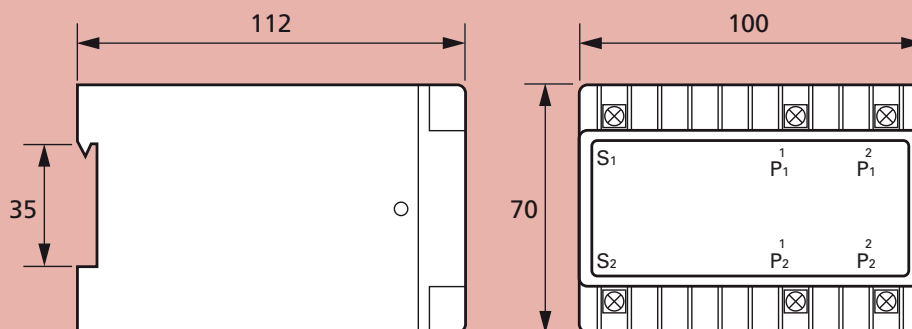

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626
International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk
<http://www.hobut.co.uk>